



## MINI-G+

# 3G/ 4G Wireless Data Logger (External Antenna)






### PRODUCT FEATURES

- Built-in 8 years battery lifespan
- Remote parameters configuration
- Data logging of totalizer, forward/reverse flow, flow rate, voltage, signal strength, error code, and smart functions .
- Robust IP68 rated housing
- User-defined logging and transmission intervals
- Set up parameters and download history data

### APPLICATIONS

- District / zone flow monitoring
- Commercial and industrial monitoring
- 3G/4G communications

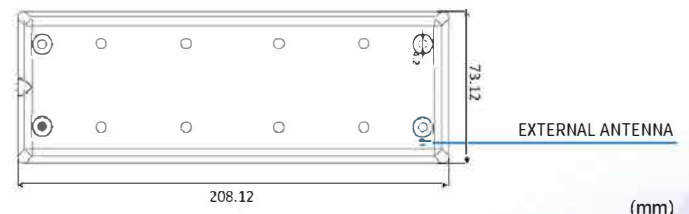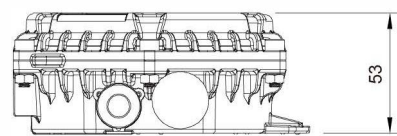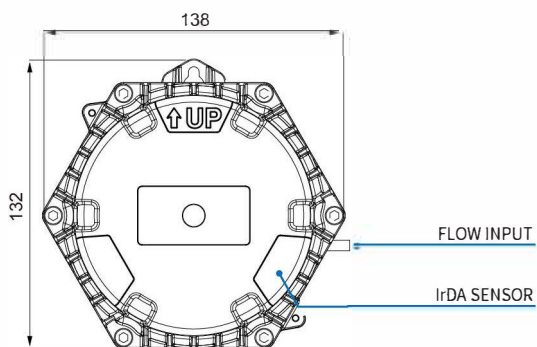

### DIMENSIONS

	Length	Width	Height	Weight
MINI-G+	138 mm	53 mm	132 mm	530 g



## TECHNICAL SPECIFICATIONS

Parameter	Specifications
Operating temperature	-25°C~70°C
Protection degree	IP68
Power supply	Built-in lithium battery with 8 years lifespan

## CONNECTIONS

Parameter	Specifications
Digital signal	EMS digital water meter
4G	FDD LTE : B1 (2100MHz) / B3 (1700MHz) / B5 (850MHz) / B7 (2600MHz) / B8 (900MHz) / B20 (800MHz)/ B28 (700MHz)
3G	UMTS : B1 (2100MHz) / B3 (1700MHz) / B8 (900MHz)
SIM	Standard SIM
Antenna	External antenna
Physical interfaces	IrDA to USB cable
Remote	Wireless configuration by 3G/4G

## LOGGING

Parameter	Specifications
Logging Capacity	Max. 159,000 logging data
Transmission	Logging frequency from 1 Min. to 1440 Mins. Transmission frequency from 1 Min. to 1440 Mins.

## COMMUNICATIONS NETWORK

